

Druckarmaturen DKOS 90°

Anschluss

Dichtkopf 24° Außenkonus O-Ring-dichtend mit metrischer Mutter S-Reihe

Norm

ISO 8434-1

Anwendung


4SH / R15 / R13 (DN51) Schläuche

Werkstoff

Stahl

Oberfläche

galvanisch verzinkt

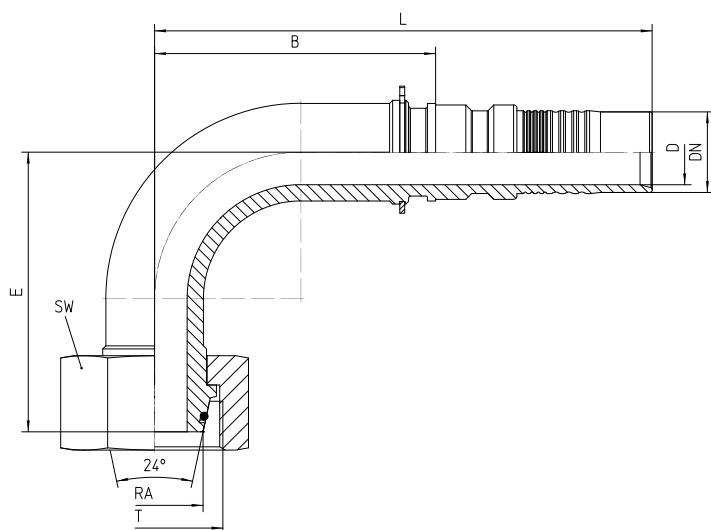

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Hinweis
7.089-10-10	16	20S	M 30x2	36	12	59	52	104	
7.089-12-12/SW41	19	25S	M 36x2	41	15	71	65	121	a
7.089-12-12/SW46	19	25S	M 36x2	46	15	71	65	121	
7.089-16-12	19	30S	M 42x2	50	15	74	65	121	
7.089-12-16/SW46	25	25S	M 36x2	46	17	94	93	160	b
7.089-16-16	25	30S	M 42x2	50	20	86	84	153	
7.589-20-16	25	38S	M 52x2	60	20	111	84	151	
7.589-20-20	31	38S	M 52x2	60	25	110	117	197	
7.589-20-24	38	38S	M 52x2	60	25	135	124	215	b

Hinweis

a) nicht nach ISO 8434-1, b) Stiftmutterausführung

Zubehör

- O-Ring DKOL/DKOS