


# Druckarmaturen

## CAT Flansch 90°

**Anschluss**  
CAT-Flansch

**Werkstoff**  
Stahl

**Oberfläche**  
galvanisch verzinkt

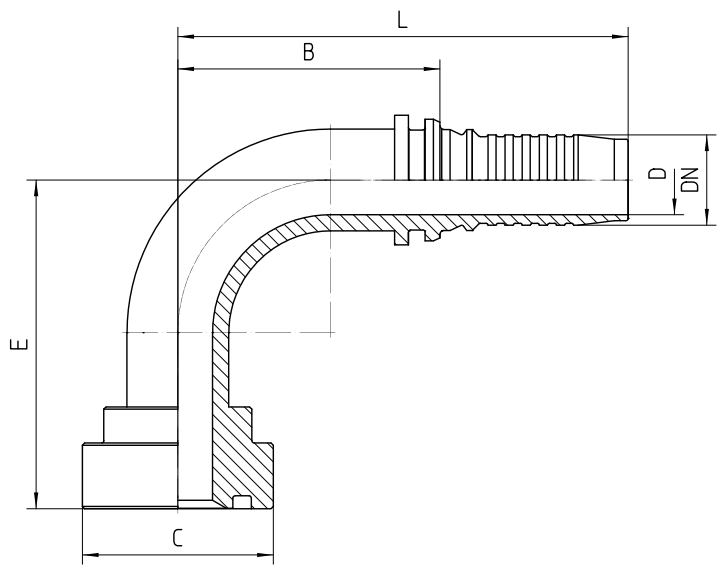

| Bestell-Nr. | DN in mm | Flansch in Zoll | C in mm | min. D in mm | E±3 in mm | B±3 in mm | L±3 in mm | Hinweis |
|-------------|----------|-----------------|---------|--------------|-----------|-----------|-----------|---------|
|-------------|----------|-----------------|---------|--------------|-----------|-----------|-----------|---------|

|                    |    |       |      |      |     |     |     |   |
|--------------------|----|-------|------|------|-----|-----|-----|---|
| <b>5.476-12-12</b> | 19 | 3/4   | 41,3 | 14,8 | 65  | 60  | 101 |   |
| <b>5.476-16-12</b> | 19 | 1     | 47,6 | 14,8 | 68  | 57  | 98  |   |
| <b>5.476-12-16</b> | 25 | 3/4   | 41,3 | 20,0 | 77  | 81  | 133 | * |
| <b>5.476-16-16</b> | 25 | 1     | 47,6 | 20,0 | 76  | 81  | 133 | * |
| <b>5.476-20-16</b> | 25 | 1 1/4 | 54,0 | 20,0 | 94  | 81  | 133 | * |
| <b>5.476-16-20</b> | 31 | 1     | 47,6 | 23,0 | 109 | 102 | 171 |   |
| <b>5.476-20-20</b> | 31 | 1 1/4 | 54,0 | 25,0 | 109 | 102 | 171 |   |
| <b>5.476-24-20</b> | 31 | 1 1/2 | 63,5 | 25,0 | 116 | 102 | 171 |   |
| <b>5.476-20-24</b> | 38 | 1 1/4 | 54,0 | 23,0 | 117 | 121 | 190 |   |
| <b>5.476-24-24</b> | 38 | 1 1/2 | 63,5 | 30,0 | 116 | 121 | 190 |   |
| <b>5.476-24-32</b> | 51 | 1 1/2 | 63,5 | 30,0 | 127 | 123 | 188 |   |

#### Hinweis

\* geänderte Kontur aus sicherheitsrelevanten Gründen, daher Maßabweichungen vom marktüblichen System