

# Druckarmaturen SFS 45°


**Anschluss**  
SAE-Flansch 6000PSI (S-Reihe)

**Norm**  
ISO 6162-2

**Anwendung**  
4SH Schläuche

**Werkstoff**  
Stahl

**Oberfläche**  
galvanisch verzinkt

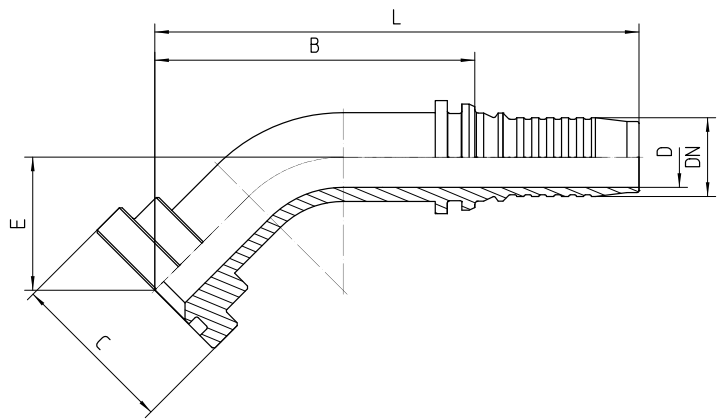

| Bestell-Nr. | DN in | Flansch in | C in | min. D in | E±3 in | B±3 in mm | L±3 in | Hinweis |
|-------------|-------|------------|------|-----------|--------|-----------|--------|---------|
|-------------|-------|------------|------|-----------|--------|-----------|--------|---------|

|                    | mm | Zoll  | mm   | mm   | mm |             | mm  |   |
|--------------------|----|-------|------|------|----|-------------|-----|---|
| <b>5.451-08-12</b> | 19 | 1/2   | 31,7 | 14,0 | 33 | 79          | 120 |   |
| <b>5.451-12-12</b> | 19 | 3/4   | 41,3 | 14,8 | 32 | 78          | 119 |   |
| <b>5.451-16-12</b> | 19 | 1     | 47,6 | 14,8 | 36 | 76          | 117 |   |
| <b>5.451-12-16</b> | 25 | 3/4   | 41,3 | 20,0 | 35 | 1.345-10-08 | 140 | * |
| <b>5.451-16-16</b> | 25 | 1     | 47,6 | 20,0 | 38 | 92          | 144 | * |
| <b>5.451-20-16</b> | 25 | 1 1/4 | 54,0 | 20,0 | 35 | 93          | 145 | * |
| <b>5.451-16-20</b> | 31 | 1     | 47,6 | 25,0 | 45 | 116         | 185 |   |
| <b>5.451-20-20</b> | 31 | 1 1/4 | 54,0 | 25,0 | 45 | 116         | 185 |   |
| <b>5.451-24-20</b> | 31 | 1 1/2 | 63,5 | 25,0 | 53 | 121         | 190 |   |
| <b>5.451-20-24</b> | 38 | 1 1/4 | 54,0 | 26,0 | 53 | 131         | 200 |   |
| <b>5.451-24-24</b> | 38 | 1 1/2 | 63,5 | 30,0 | 53 | 116         | 185 |   |
| <b>5.451-32-24</b> | 38 | 2     | 79,4 | 30,0 | 55 | 126         | 195 |   |
| <b>5.451-24-32</b> | 51 | 1 1/2 | 63,5 | 30,0 | 55 | 130         | 195 |   |
| <b>5.451-32-32</b> | 51 | 2     | 79,4 | 40,0 | 55 | 130         | 195 |   |

#### Hinweis

\* geänderte Kontur aus sicherheitsrelevanten Gründen, daher Maßabweichungen vom marktüblichen System

#### Zubehör

- O-Ring SAE-Flansch