

Pressure fittings
SFL 45°


Connection
SAE-flange 3000PSI (L series)

Standard
ISO 6162-1

Application
3SPC / 4SP hoses / 4SH19 / 4SH25

Material
Steel

Surface protection
Zinc-electroplated

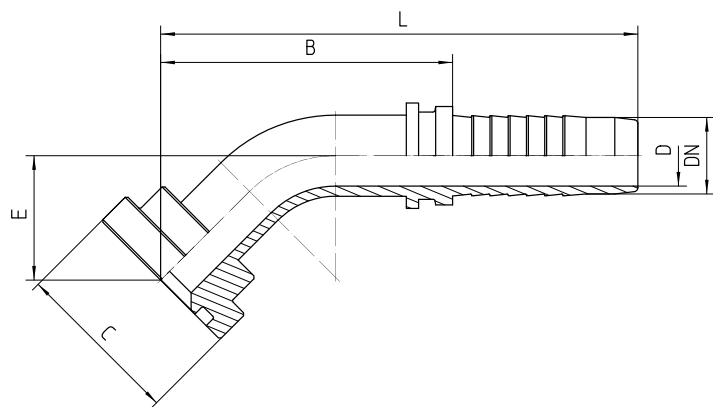

Bestell-Nr.	DN in mm	flange in inch	C in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm
-------------	----------	----------------	---------	--------------	-----------	-----------	-----------

4.450-08-08	12	1/2	30,2	9,0	23	44	89
4.450-12-08	12	3/4	38,1	9,0	23	45	87
4.450-08-10	16	1/2	30,2	12,0	27	66	108
4.450-12-10	16	3/4	38,1	12,0	28	66	108
4.450-08-12	19	1/2	30,2	13,5	29	74	120
4.450-12-12	19	3/4	38,1	14,8	33	74	120
4.450-16-12	19	1	44,5	14,8	31	73	119
4.450-12-16	25	3/4	38,1	19,9	32	76	131
4.450-16-16	25	1	44,5	19,9	32	82	137
4.450-20-16	25	1 1/4	50,8	19,9	31	72	127