Pressure fittings
DKOS 90°

Connection
Sealing head 24° outside cone O-ring sealing with metric nut S series

Standard
ISO 8434-1

Application
4SH flexible tubes

Material
Steel

Surface protection
Zinc-electroplated

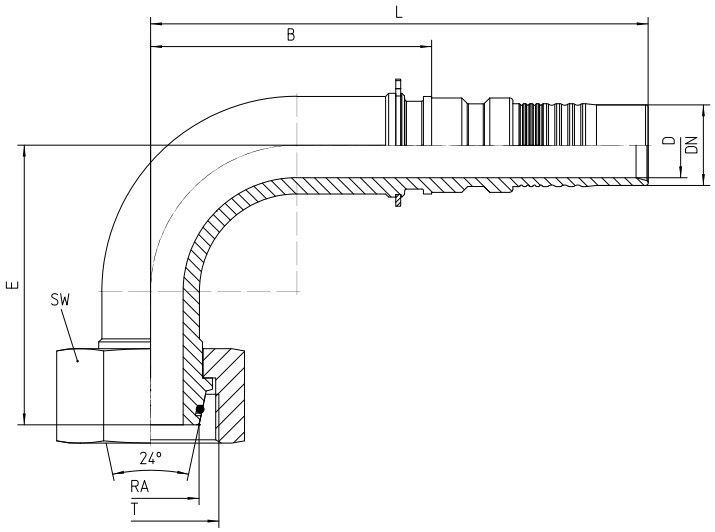

Dietzel Hydraulik GmbH
Leedenstraße 10
04626 Löbichau

Tel.: +49 (36602) 140-140
E-Mail: vertrieb@dietzel-hydraulik.de

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Note
5.089-10-12	19	20S	M 30x2,0	36	13,0	68	60	101	
5.089-12-12/SW46	19	25S	M 36x2,0	46	14,8	70	60	101	
5.089-16-12	19	30S	M 42x2,0	50	14,8	67	60	101	
5.089-12-16/SW46	25	25S	M 36x2,0	46	15,0	76	81	133	*
5.089-16-16	25	30S	M 42x2,0	50	20,0	80	82	131	*
5.089-20-16	25	38S	M 52x2,0	60	20,0	75	81	133	*
5.089-16-20	31	30S	M 42x2,0	50	20,0	108	102	171	
5.089-20-20	31	38S	M 52x2,0	60	25,0	108	102	171	
5.089-20-24	38	38S	M 52x2,0	60	25,0	108	121	190	

Note
* changed outline to improve the safety, therefore measurements differ from standard systems

Accessories
3437309

Dietzel Hydraulik GmbH
Leedenstraße 10
04626 Löbichau

Tel.: +49 (36602) 140-140
E-Mail: vertrieb@dietzel-hydraulik.de