Pressure fittings
CES straight

Connection
Metric male thread 24° with inner cone, and pipe connection S series

Standard
ISO 8434-1

Application
4SH / R15 / R13 (DN51) flexible tubes

Material
Steel

Surface protection
Zinc-electroplated

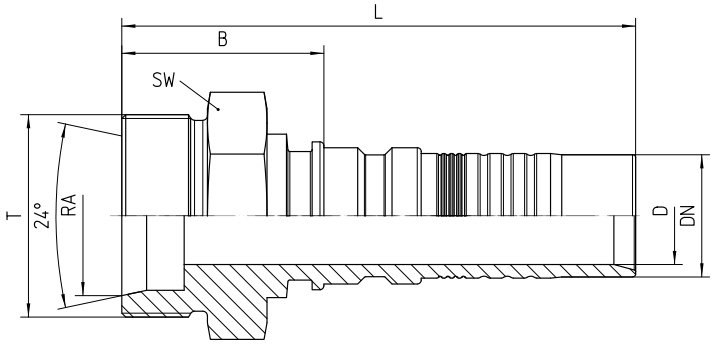

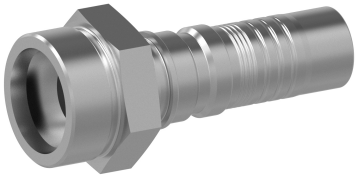

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	B±3 in mm	L±3 in mm

Dietzel Hydraulik GmbH
Leedenstraße 10
04626 Löbichau

Tel.: +49 (36602) 140-140
E-Mail: vertrieb@dietzel-hydraulik.de

7.180-10-10	16	20S	M 30X2	32	12,0	36	88
7.180-12-12	19	25S	M 36X2	36	15,0	41	98
7.180-16-16	25	30S	M 42x2	46	20,0	43	110
7.180-20-20	31	38S	M 52x2	55	25,0	52	132
7.180-24-24	38	50S	M 68x2	70	30,0	57	148

Dietzel Hydraulik GmbH
Leedenstraße 10
04626 Löbichau

Tel.: +49 (36602) 140-140
E-Mail: vertrieb@dietzel-hydraulik.de